

CHAIN HOIST


CHAIN HOIST

CHAIN HOIST CH-B TYPE

CHAIN HOIST CH-B TYPE

Features:

- Light weight robust construction.
- Automatic double pawl braking system.
- Extra thick asbestos-free friction discs.
- Drop forged alloy hooks are designed to stretch when overloaded before chain failure and are equipped with integrated heavy duty safety latch.
- High grade alloy steel load chain and zinc plated hand chain.
- Each hoist is proof tested at 1.5 times the rated capacity for rated capacities less than 20t and 1.25 the rated capacity equal to or greater than 20t.
- Complies with EN13157, ASME B30.16, AS1418.2, SANS 1594.
- Overload protection(optional).
- Bottom hook with bearing(optional).
- Chain bag (optional).
- Needle roller bearing between load sprocket and side plates (optional).

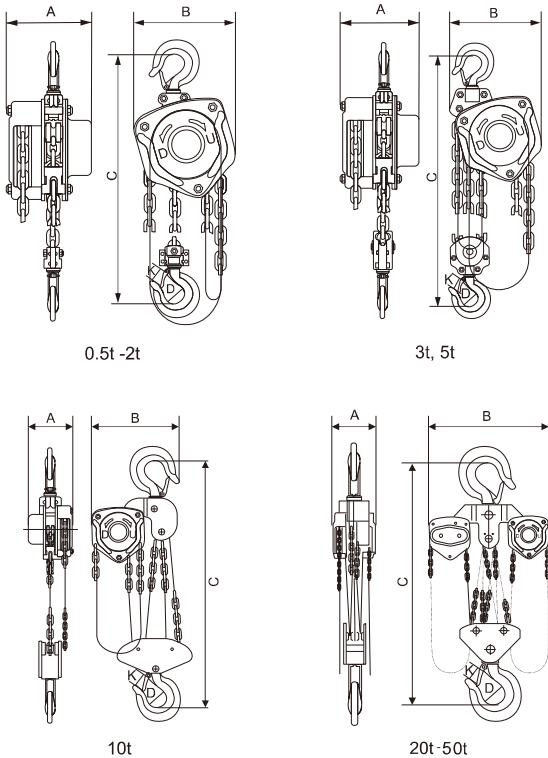

Model	Capacity	Standard Lift	Pro Load	Effort Required to Lift Rated Load	No. of Falls of Load Chain	Load Chain	Dimensions(mm)						N.W.	Extra Weight per Metre	Product Code
	l	m	kN	N		mm	A	B	C	D	K	kg	kg		
CHB0050	0,5	3	7,35	200	1	6x18	137,5	137	270	35	28	9,5	1,6	110100500	
CHB0100	1	3	14,7	320	1	6x18	146,5	162	340	35,5	26	11,6	1,6	110101000	
CHB0150	1,5	3	22,1	360	1	8x24	170	183	399	45	32,5	16,3	2,2	110101500	
CHB0200	2	3	29,4	365	1	8x24	170	194	414	42,5	32	18	2,2	110102000	
CHB0300	3	3	44,1	385	2	8x24	170	220	512	50	37	24,3	3,6	110103000	
CHB0500	5	3	73,5	435	2	10x30	190	288	636	64	46	38,7	5,2	110105000	
CHB1000	10	3	147	435	4	10x30	190	384	743	85	50	78	9,5	110110000	
CHB2000	20	3	245	435X2	8	10x30	209	625	890	110	81	163,6	19	110120000	
CHB3000	30	3	367,5	435X2	12	10x30	312	691	1380	110	81	220	27,7	110130000	
CHB5000	50	3	612,5	435X2	22	10x30	496	958	2578	170	125	1092	49,4	110150000	

Remarks:Hoists with the lift in other length are also available.

