




TSURUMI PUMP

C-SERIES CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS

DIMENSIONS

TOS100C43.7-CR -63 (3"Dis.)

Guide Rail System
Model : TOS3-80-80 ANSI
Wt. : 64lb.(29kg)

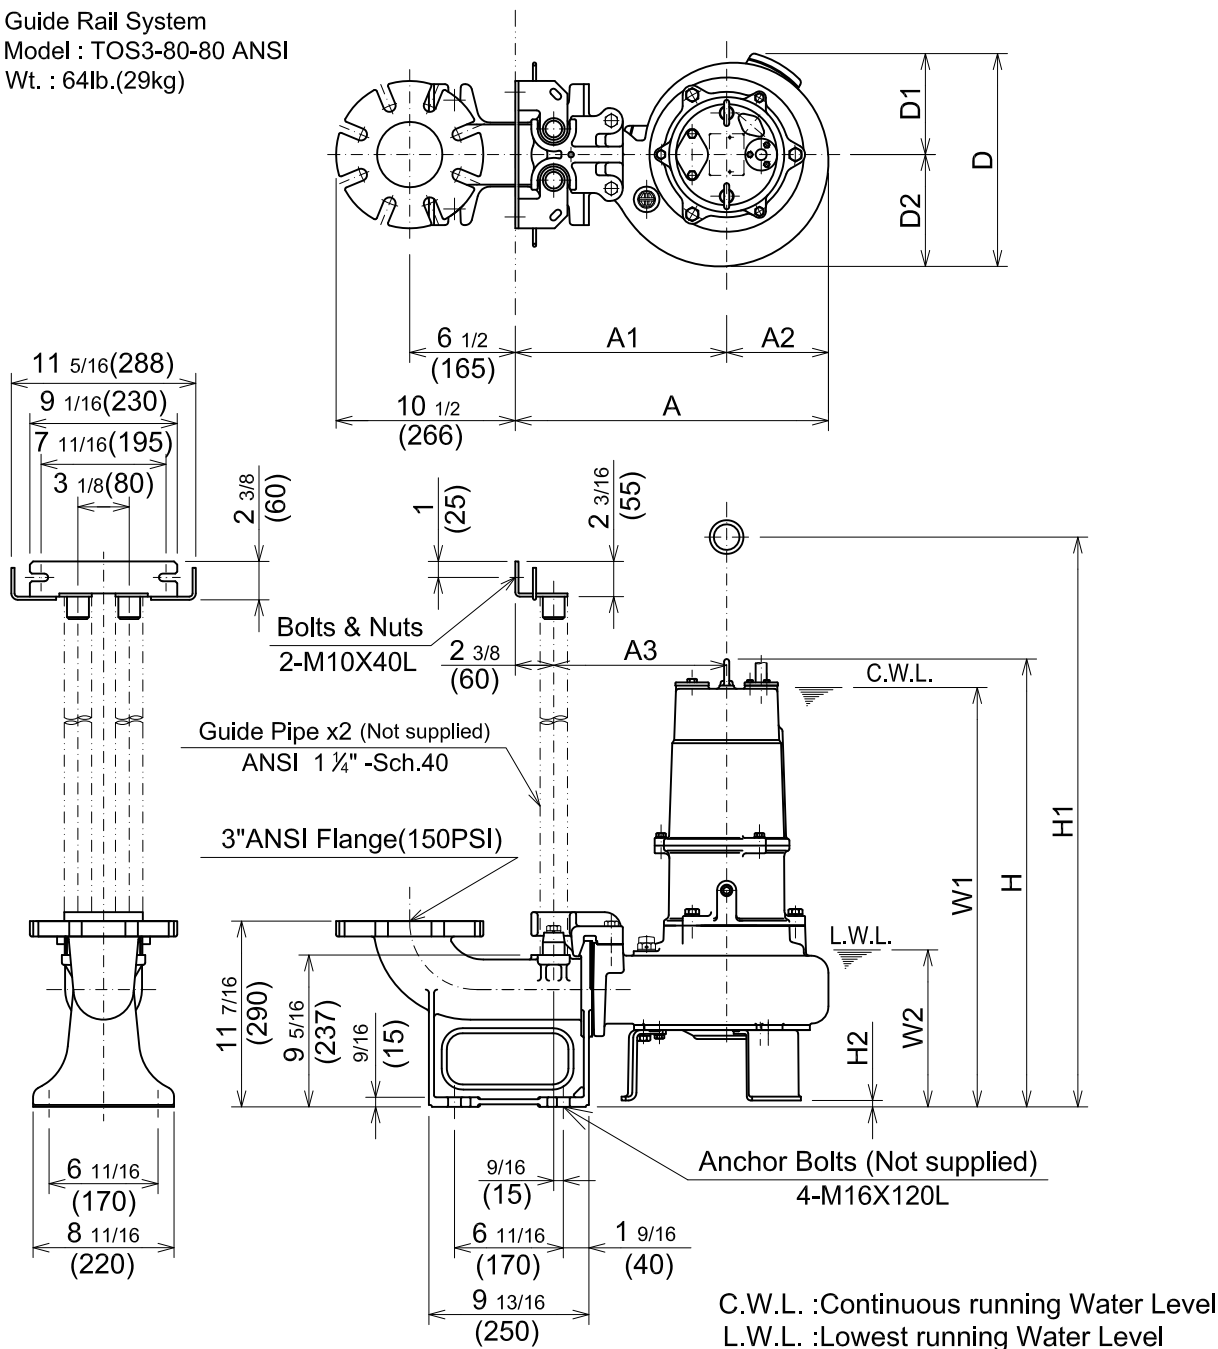


DIMENSIONS:USCS(Inch)

Model	HP	NOM. SIZE	Pump & Motor											C.W.L.	L.W.L.	*Wt.
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	(lbs.)	
TOS100C43.7-CR -63	5	3"	19 1/4	13	6 1/4	10 5/8	13 1/8	6 7/16	6 1/4	27 9/16	33 7/8	3/8	25 3/4	9 5/8	176	

DIMENSIONS:METRIC(mm)

Model	kW	NOM. SIZE	Pump & Motor										C.W.L.	L.W.L.	*Wt. (kg)
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	
TO500C43.7-CR -63	3.7	80	489	330	159	270	333	158	175	700	860	10	655	245	80

*Excluding
TOS & Cable.

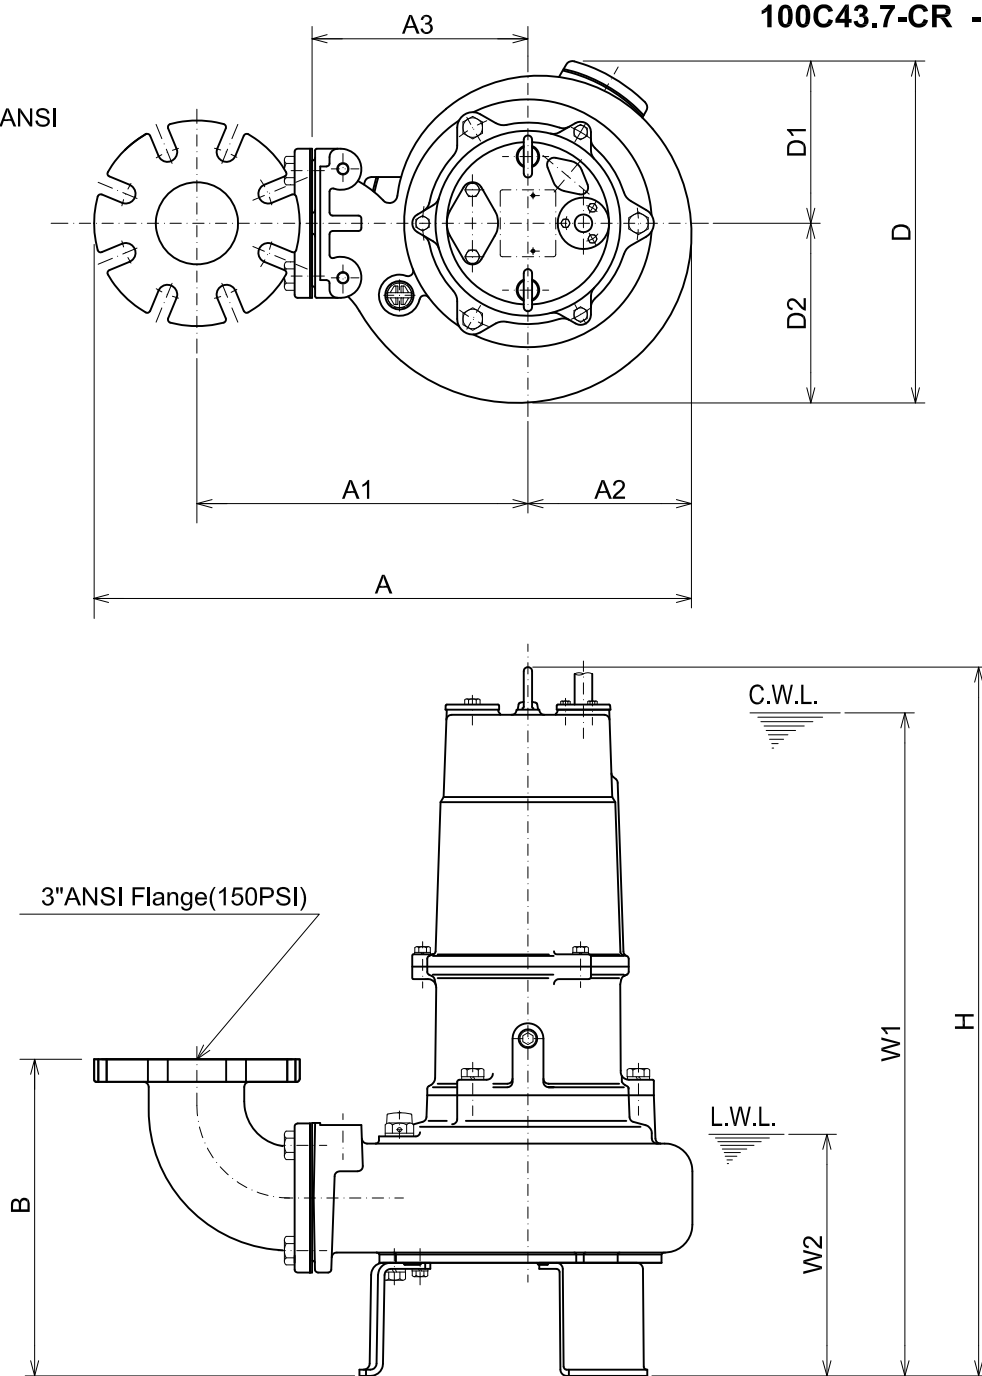**TSURUMI PUMP****C-SERIES
CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS****DIMENSIONS**Bend model:
BEND80-80 ANSI**100C43.7-CR -63 (3"Dis.)**C.W.L. :Continuous running Water Level
L.W.L. :Lowest running Water Level**DIMENSIONS:USCS(Inch)**

Model	HP	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (lbs.)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C43.7-CR -63	5	3"	23 3/16	13	6 1/4	8 1/4	12 1/8	13 1/8	6 1/4	6 7/8	27 3/16	25 3/8	9 1/4	181

DIMENSIONS:METRIC(mm)

Model	kW	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (kg)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C43.7-CR -63	3.7	80	589	330	159	210	308	333	158	175	690	645	235	82


*Excluding Cable.

**TSURUMI PUMP****C-SERIES
CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS****DIMENSIONS****TOS100C43.7-CR -63**

Guide Rail System

Model : TOS3-80-100 ANSI

Wt. : 68lb.(31kg)

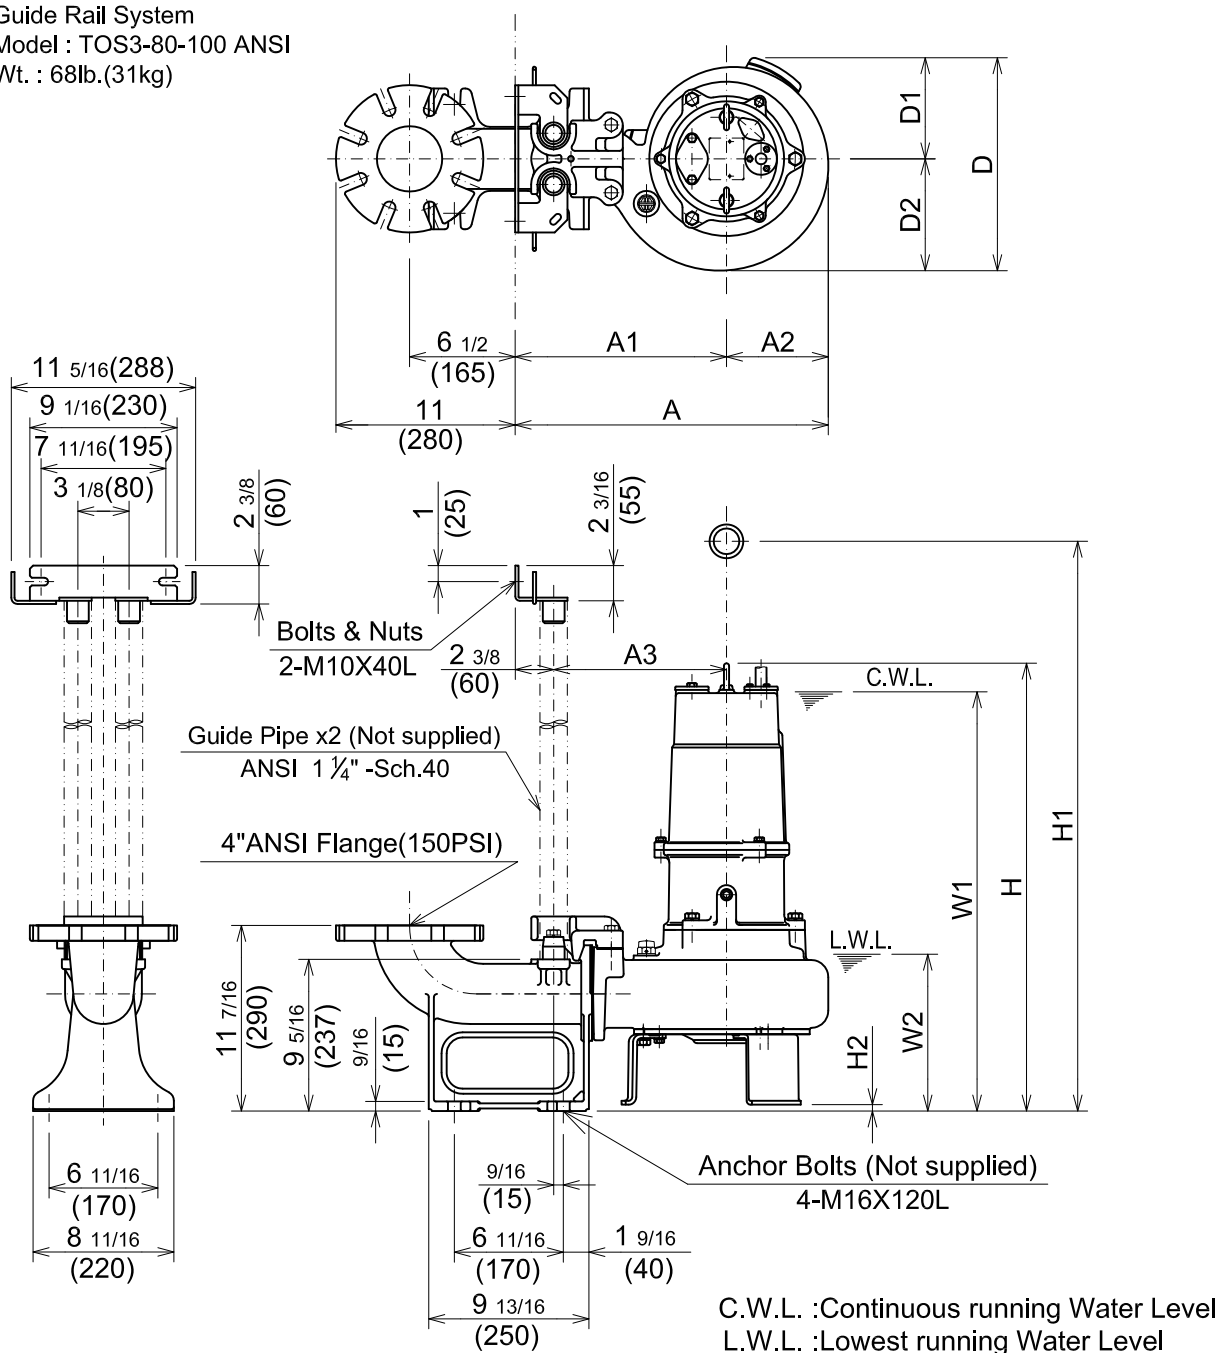**DIMENSIONS:USCS(Inch)**

Model	HP	NOM. SIZE	Pump & Motor										C.W.L.	L.W.L.	*Wt.
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	(lbs.)
TOS100C43.7-CR -63	5	4"	19 1/4	13	6 1/4	10 5/8	13 1/8	6 7/16	6 1/4	27 9/16	33 7/8	3/8	25 3/4	9 5/8	176

DIMENSIONS:METRIC(mm)

Model	kW	NOM. SIZE	Pump & Motor										C.W.L.	L.W.L.	*Wt.
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	(kg)
TOS100C43.7-CR -63	3.7	100	489	330	159	270	333	158	175	700	860	10	655	245	80

*Excluding
TOS & Cable.


TSURUMI PUMP

C-SERIES
CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS

DIMENSIONS

100C43.7-CR -63

Bend model:
BEND80-100 ANSI

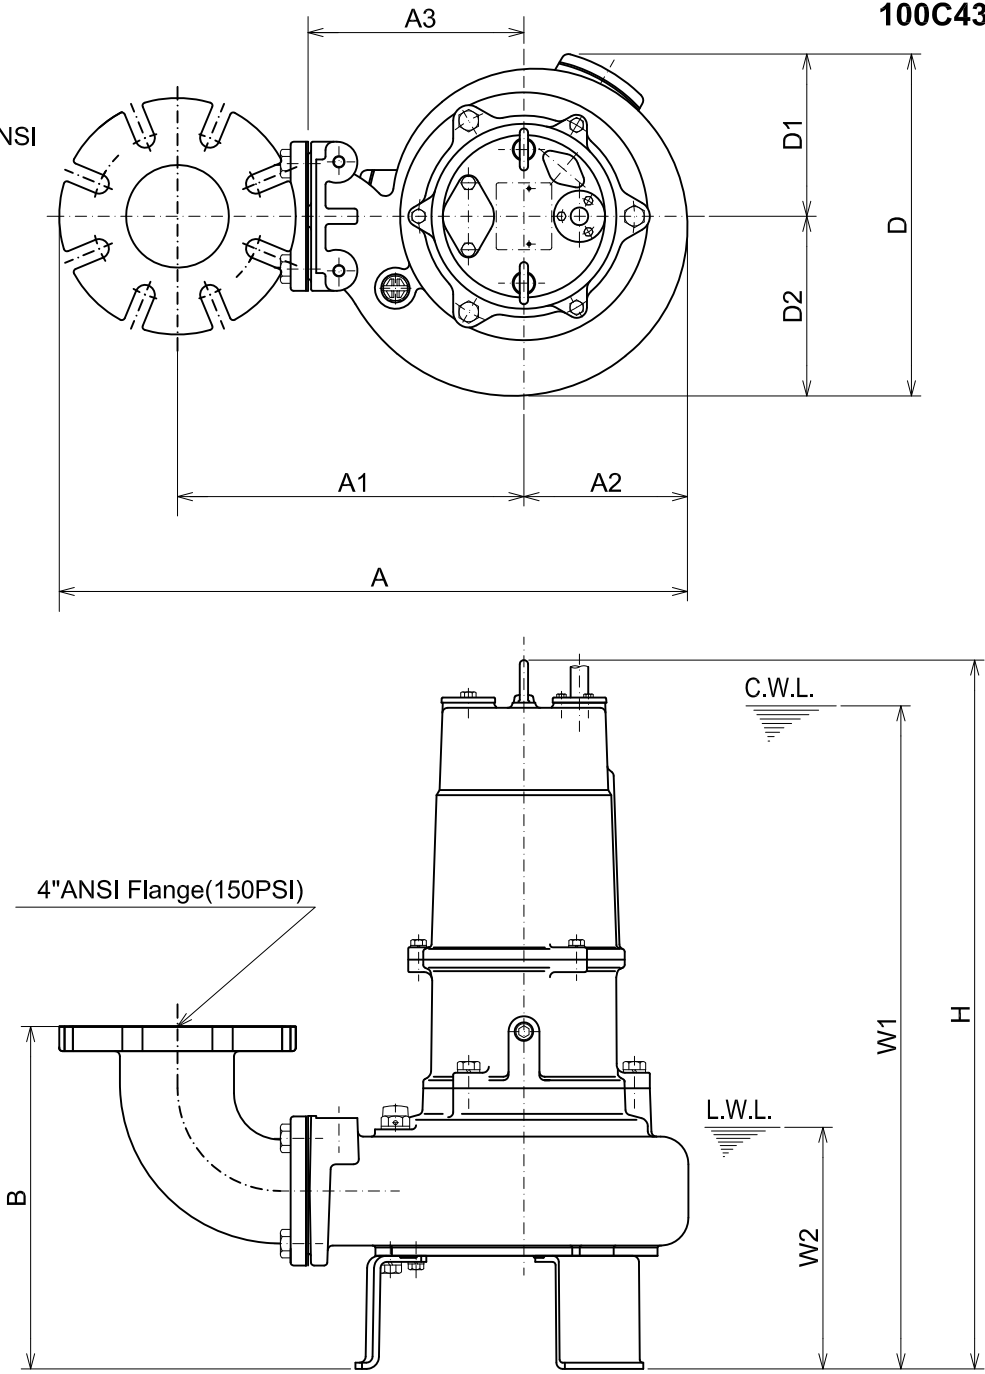

C.W.L. :Continuous running Water Level
L.W.L. :Lowest running Water Level

DIMENSIONS:USCS(Inch)

Model	HP	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (lbs.)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C43.7-CR -63	5	4"	24 3/8	13 9/16	6 1/4	8 1/4	13 1/8	13 1/8	6 1/4	6 7/8	27 3/16	25 3/8	9 1/4	183

DIMENSIONS:METRIC(mm)

Model	kW	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (kg)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C43.7-CR -63	3.7	100	619	345	159	210	333	333	158	175	690	645	235	83

*Excluding Cable.