

WIRE ROPE PULLING HOIST

Wire rope pulling hoist is a compact and lightweight hoist that can be used for lifting, pulling and tightening over a long distance. It works with a steel wire rope running through the jaws of the hoist. The double sets of jaws open in turns so that the wire rope will always stay tight during the operation.


20 m coiled steel wire rope with latch hook is included.

Features:

- Each hoist is dynamic proof load tested 1.5 x WLL before leaving the factory, except 5400KG(1.25 x WLL).
- Compact, lightweight construction.
- Durable construction with powder coated finish and plated frame components.
- Equipped with replaceable shear safety pin that prevents overloading (3 spare pins included).
- 20 m coiled steel wire rope with latch hook is included and other lengths can be offered.
- Hooks fitted with steel safety latches.
- Test certificate and user manual enclosed with each hoist.
- Spare parts available.
- Rotating hook attached to the body is available.
- **Standard:** EN 13157
- **Safety factor:** 4:1



With swivel hook is also available

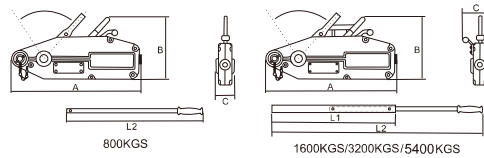




Wire Rope Pulling Hoist WRH-H Type (Aluminum Body)

Model	Rated Capacity	Rope Advance per Full Stroke	Lever Pull at WLL	Rope Diameter	Standard Length of Wire Rope	Net Weight without Cable	Cable Weight	Max. Overall Size (mm)			L1 (cm)	L2 (cm)	Product Code
	kg	mm	N	mm	m	kg	kg	A	B	C			
H008	800	≥52	343	8,3	20	6,2	6,3	430	240	60	—	80	190100800
H016	1600	≥55	441	11	20	11,8	12	556	270	68	80	120	190101600
H032	3200	≥28	441	16	20	21,2	22,5	666	320	98	80	120	190103200
H054	5400	≥30	745	20	20	56,5	35	940	410	160	88	135	190105400

WIRE ROPE PULLING HOIST



Wire Rope Pulling Hoist WRH-S Type (Steel Body)

Model	Rated Lifting Capacity	Rope Advance per Full Stroke	Rated Forward Handpower	Rope Diameter	Standard Length of Wire Rope	Net Weight without Cable	Cable Weight	Max. Overall Size (mm)			L1 (cm)	L2 (cm)	Product Code
	kg	mm	N	mm	m	kg	kg	A	B	C			
S008	800	≥52	343	8,3	20	8	6,3	440	265	63	—	80	190200800
S016	1600	≥55	441	11	20	14,5	12	550	300	77	80	120	190201600
S032	3200	≥28	441	16	20	28	22,5	690	350	91	80	120	190203200

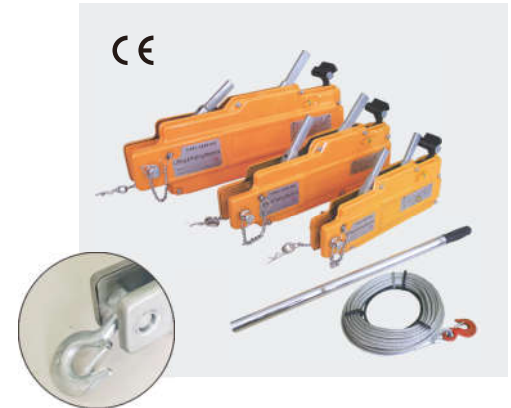

Wire Rope Pulling Hoist WRH-HS Type (Steel Body)

Model	Rated Capacity	Rope Advance per Full Stroke	Lever Pull at WLL	Rope Diameter	Standard Length of Wire Rope	Net Weight without Cable	Cable Weight	Max. Overall Size (mm)			L1 (cm)	L2 (cm)	Product Code
	kg	mm	N	mm	m	kg	kg	A	B	C			
HS008	800	≥52	353	8,3	20	7	6,3	435	245	70	—	80	190300800
HS016	1600	≥55	412	11	20	12	12	545	286	92	80	120	190301600
HS032	3200	≥28	441	16	20	23	22,5	655	345	105	80	120	190303200



With swivel hook is also available