



TSURUMI PUMP

C-SERIES


CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS

DIMENSIONS

Guide Rail System
Model : TOS3-100-100 ANSI
Wt. : 108lb. (49kg)

TOS100C45.5-CR -63

TOS100C47.5-CR -63

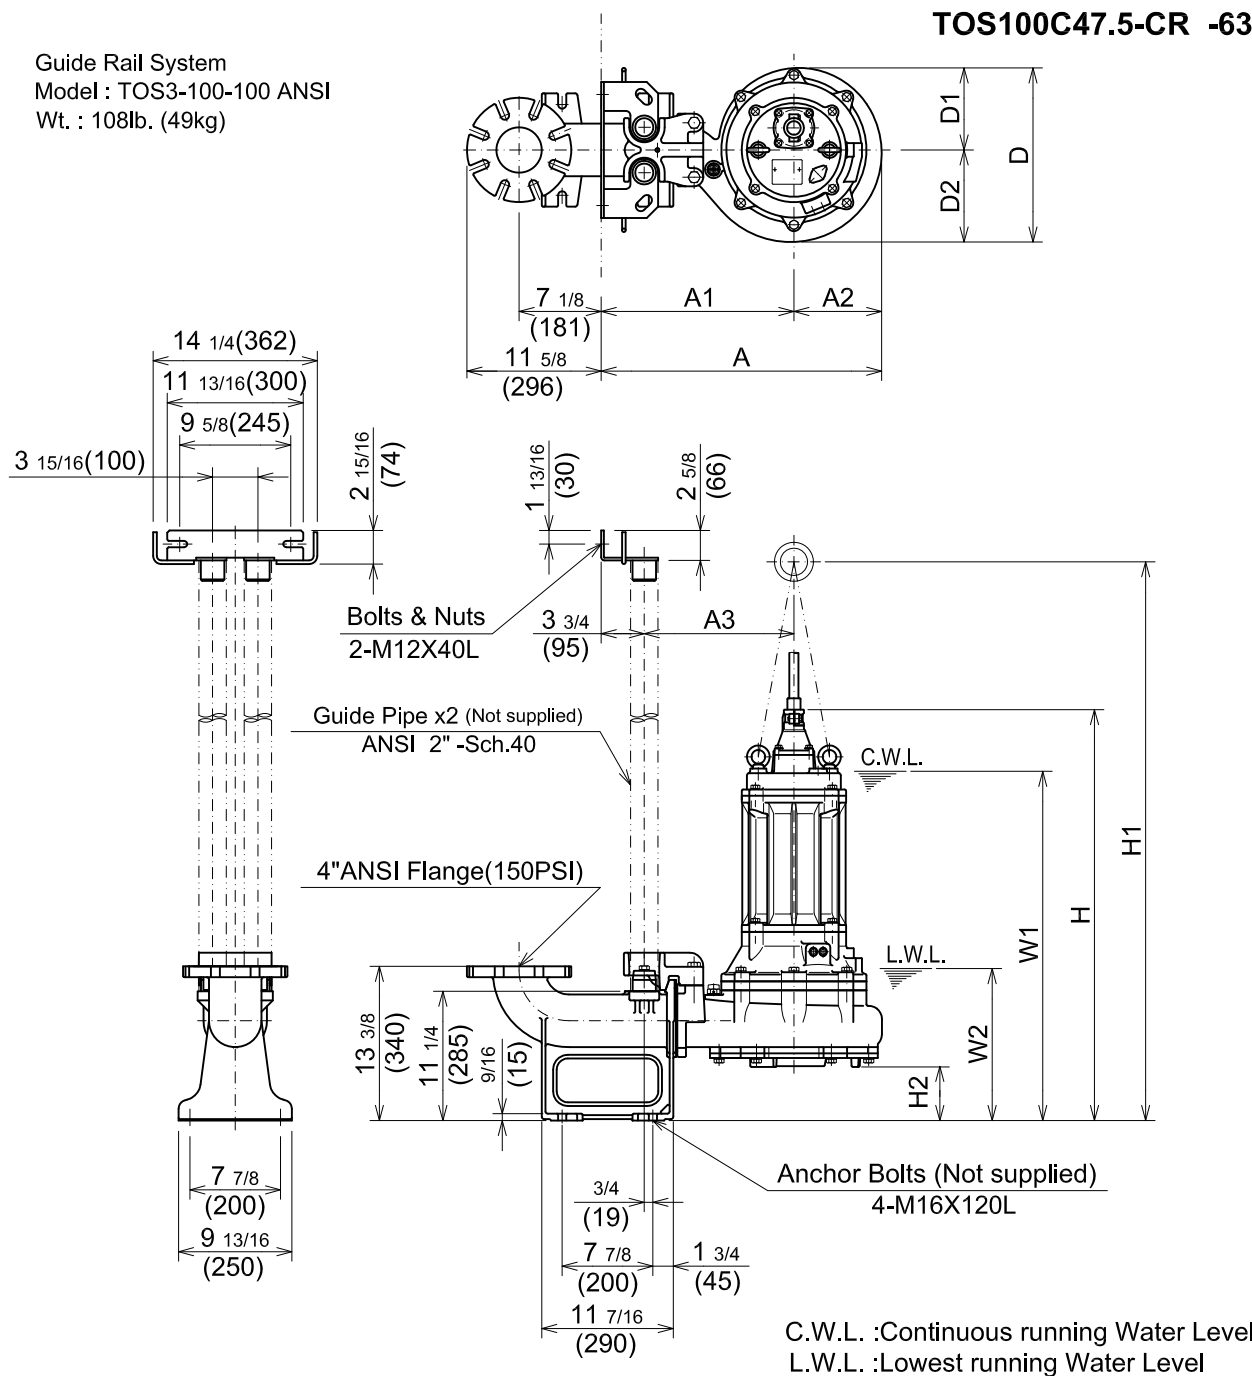

C.W.L. :Continuous running Water Level
L.W.L. :Lowest running Water Level

DIMENSIONS:USCS(Inch)

Model	HP	NOM. SIZE	Pump & Motor										C.W.L.	L.W.L.	*Wt.
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	(lbs.)
TOS100C45.5-CR -64	7.5	4"	24 3/8	16 3/4	7 5/8	13	15 1/8	7 1/8	8	35 11/16	48 3/4	4 5/8	30 1/2	13 1/4	293
TOS100C47.5-CR -64	10	4"	24 3/8	16 3/4	7 5/8	13	15 1/8	7 1/8	8	36 1/2	50 1/4	4 5/8	31 1/2	13 1/4	335

DIMENSIONS:METRIC(mm)



Model	kW	NOM. SIZE	Pump & Motor										C.W.L.	L.W.L.	*Wt. (kg)
			A	A1	A2	A3	D	D1	D2	H	H1	H2	W1	W2	
TOS100C45.5-CR -64	5.5	100	619	425	194	330	384	181	203	906	1237	118	775	335	133
TOS100C47.5-CR -64	7.5	100	619	425	194	330	384	181	203	927	1275	118	800	335	152

***Excluding
TOS & Cable.**

**TSURUMI PUMP****C-SERIES
CUTTER - TYPE - SEWAGE & WASTEWATER PUMPS****DIMENSIONS**

Bend model:
BEND100-100 ANSI

100C45.5-CR -63
100C47.5-CR -63

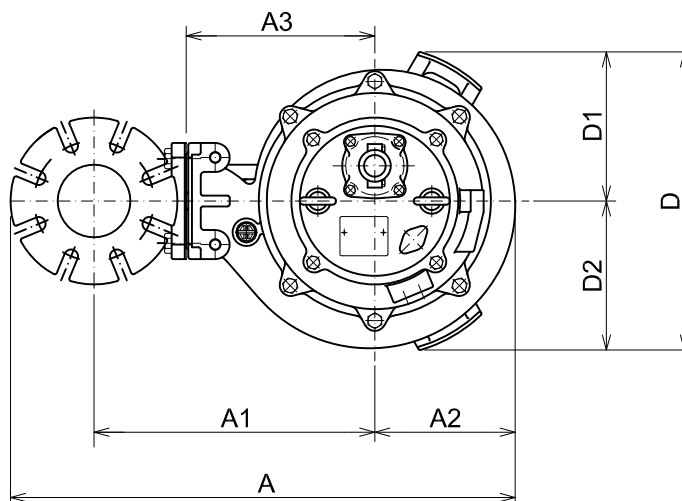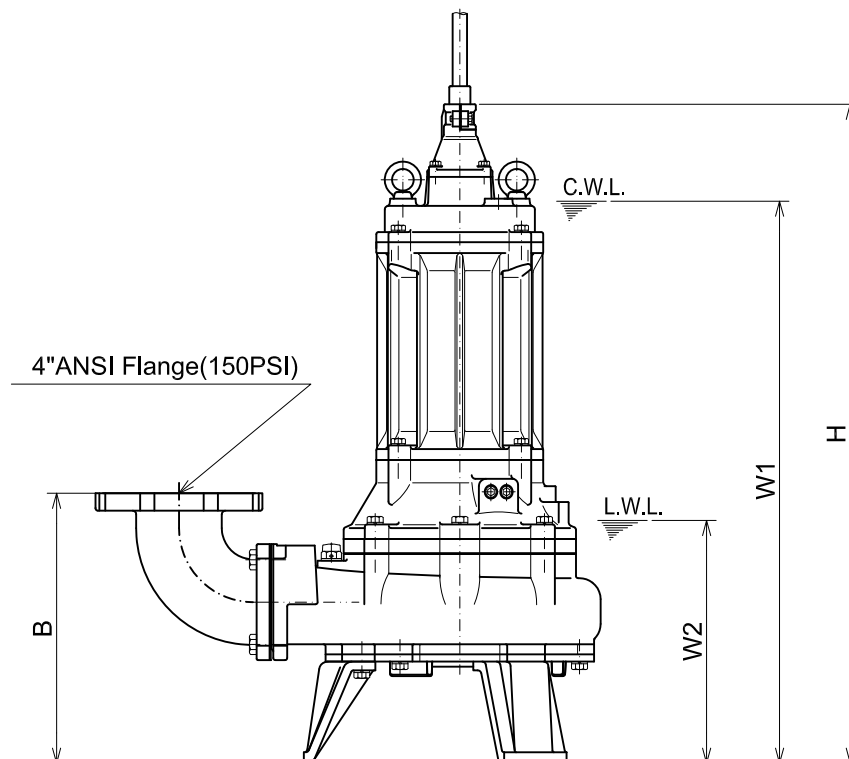

C.W.L. :Continuous running Water Level
L.W.L. :Lowest running Water Level

DIMENSIONS:USCS(Inch)

Model	HP	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (lbs.)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C45.5-CR -63	7.5	4"	27 13/16	15 5/8	7 5/8	10 1/4	14 5/8	16 1/8	8 1/16	8 1/16	35 3/4	30 1/2	13 1/4	298
100C47.5-CR -63	10	4"	27 13/16	15 5/8	7 5/8	10 1/4	14 5/8	16 1/8	8 1/16	8 1/16	36 9/16	31 1/2	13 1/4	340

DIMENSIONS:METRIC(mm)

*Excluding Cable.

Model	kW	NOM. SIZE	Pump & Motor									C.W.L.	L.W.L.	*Wt. (kg)
			A	A1	A2	A3	B	D	D1	D2	H	W1	W2	
100C45.5-CR -63	5.5	100	706	397	194	260	372	410	205	205	908	775	335	135
100C47.5-CR -63	7.5	100	706	397	194	260	372	410	205	205	929	800	335	154